


DV 1

Professional systems for mini camcorders

The DV 1 system stands out because of its ideal payload range of up to 2 kg / 4.4 lb. An outstanding choice for all that mini camcorders – which are being increasingly used for professional acquisition – have to offer.

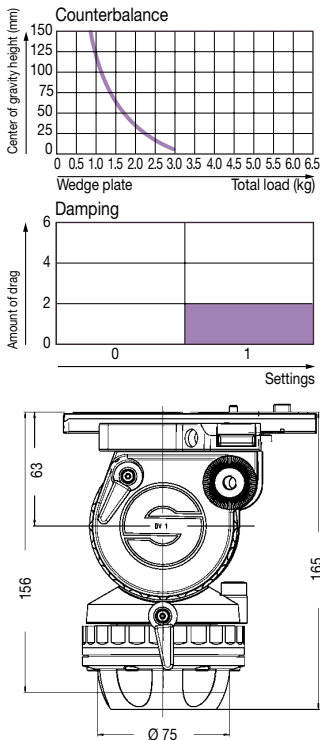

Dimensions in mm



SYSTEM DV 1

Code	0110
Weight	4.5 kg / 9.9 lb
Payload	0.5 to 2 kg / 1.1 to 4.4 lb
Camera plate	90 mm / 3.5" sliding range
Drag steps	1 and 0
Tilt range	+60° to -60°
Temperature range	-40 to +60 °C / -40 to +140 °F
Tripod fitting	75 mm ball
Pan bar	Standard pan bar
Height range	77 cm to 157 cm / 30" to 62"
Transport length	100 cm / 39.4"

SYSTEM DV 1 / 2D

Code	0111
Weight	4.8 kg / 10.6 lb
Payload	0.5 to 2 kg / 1.1 to 4.4 lb
Camera plate	90 mm / 3.5" sliding range
Drag steps	1 and 0
Tilt range	+60° to -60°
Temperature range	-40 to +60 °C / -40 to +140 °F
Tripod fitting	75 mm ball
Pan bar	Standard pan bar
Height range	50 cm to 163 cm / 20" to 64"
Transport length	83 cm / 33"



System DV 1



System DV 1 / 2D

System DV 1

Consisting of
DV 1
+ 1-stage tripod DA 75 L
+ spreader SP 75

System DV 1 / 2D

Consisting of
DV 1
+ 2-stage tripod ENG 75/2D
+ spreader SP 75

ACCESSORIES



Pan bars DV

Camera plate DV 1

Adapter 75/100

Padded bag